




EOS - 500 - 600

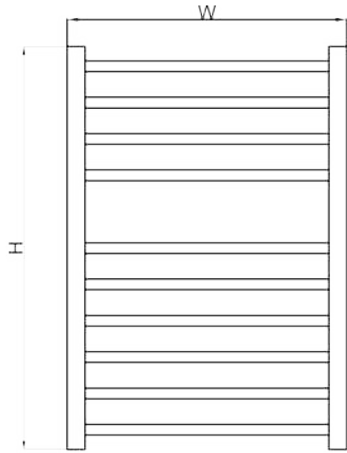


Front View

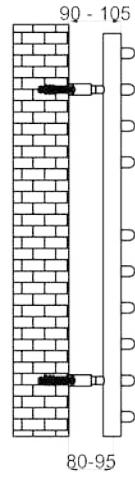

Side View

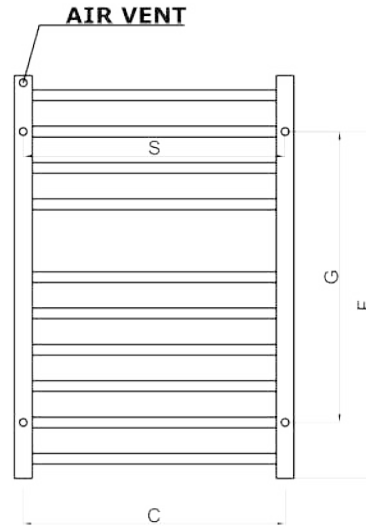

Back View

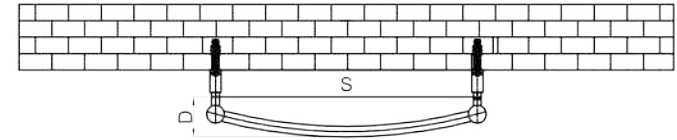

Top View

SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



INSERT 4 PCS



GRAB SCREW 4 PCS



BRACKET 4 PCS



ALIEN KEY 1 PCS

MATERIAL DETAILS



-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-ES5072 : EOS RADIATOR)
-POLISHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H mm	W mm	D mm	C mm	S mm	F mm	G mm	- L	- kg	Watt - BTU/hr (Δ50°)
EOS 430 X 500	RNS-ES5043	430	500	72	468	468	330	230	1.19	1.90	230 - 783
EOS 720 X 500	RNS-ES5072	720	500	72	468	468	620	520	1.99	3.18	458 - 1562
EOS 1200 X 500	RNS-ES5120	1200	500	72	468	468	1100	1000	3.26	5.16	630 - 2147
EOS 1500 X 500	RNS-ES5150	1500	500	72	468	468	1400	1300	4.07	6.44	839 - 2860
EOS 430 X 600	RNS-ES6043	430	600	87	568	568	330	230	1.33	2.17	262 - 895
EOS 720 X 600	RNS-ES6072	720	600	87	568	568	620	520	2.22	3.62	494 - 1685
EOS 1200 X 600	RNS-ES6120	1200	600	87	568	568	1100	1000	3.62	5.87	754 - 2570
EOS 1500 X 600	RNS-ES6150	1500	600	87	568	568	1400	1300	4.53	7.33	887 - 3025

REINA