HELIN - 500

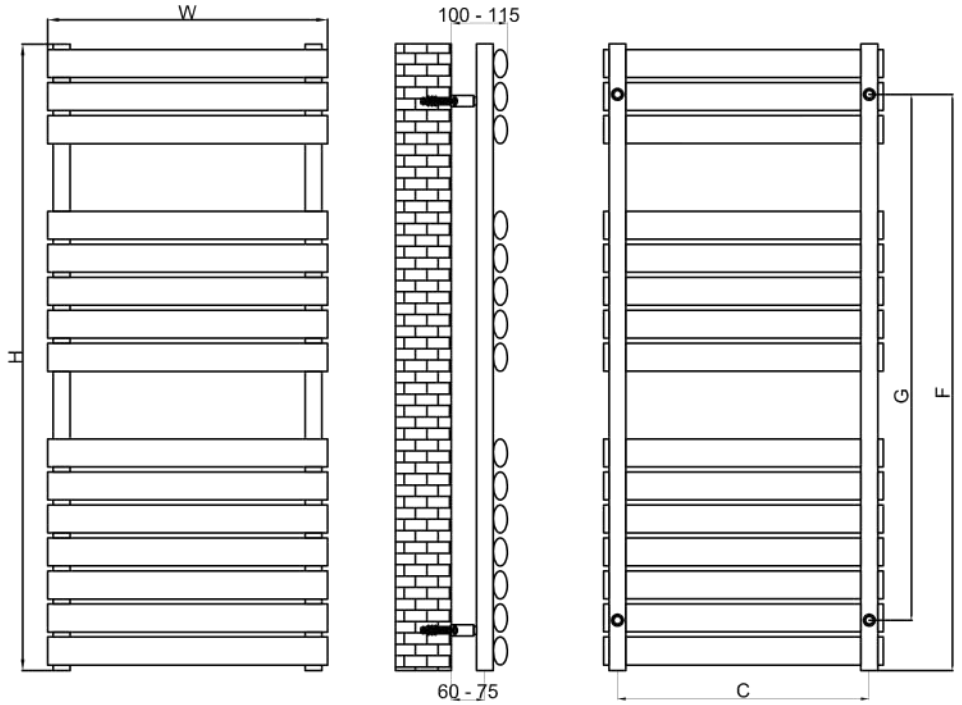

Front View **Side View** **Back View**

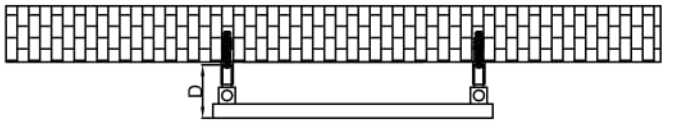

Top View

SUPPLIED INSTALLATION ACCESSORIES

SCREW 4 PCS

WALL PLUG 4 PCS

BRACKET 4 PCS

GRAB SCREW 4 PCS

ALIEN KEY 1 PCS

AIR VENT 1 PCS

BLANKING PLUG 1 PCS

-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-HLN5112P : HELIN RADIATORS)
-POLISHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

MATERIAL DETAILS



Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
HELIN 826 X 500	**RNS - HLN5080P**	826	500	95	450	450	736	637	5.17	7.10	774 - 2640
HELIN 1120 X 500	**RNS - HLN5112P**	1120	500	95	450	450	1030	940	7.71	10.34	1084 - 3696
HELIN 1535 X 500	**RNS - HLN5153P**	1535	500	95	450	450	1445	1355	10.30	13.90	1396 - 4762

REINA

www.reinadesign.co.uk | info@atayglobal.com | Tel : +44 1787 238540